



XT CLASSIC - 2 GROUPS

SIX PRE-SET PROFILES For each group you can set up to six different recipes and save them on the six programmable buttons. Get to know your customers and always be ready to make them their favourite coffee drink.

TEMPERATURE CONTROL The original patented multiboiler technology - only the best to extract your coffee at the perfect temperature, precise down to one decimal of a degree.

ERGONOMIC DC design in every detail to guarantee maximum comfort to the barista, 54mm portafilter and optional 58mm portafilter kit: you choose the best extraction.

dimensions (w x h x d)	730x525x510 mm
weight	74 kg
power consumption (24h-stand-by)	7,9 kW
max power	4,5 kW
connected load	230/240 V 1 Ph - 200/230 V 3, 400 V 3 N
boiler capacity	7,5 l
group head capacity	0,5 l
GCS Grinder Control System	optional
MCS Milk Control System	optional


Version 230 also available

XT CLASSIC - 2 GROUPS



DYNAMIC WHITE

2 gr 1-MC-DCPROXT6T-2-DW-400



TOTAL WHITE

2 gr 1-MC-DCPROXT6T-2-TW-400



WHITE OAK

2 gr 1-MC-DCPROXT6T-2-WO-400



DARK WALNUT

2 gr 1-MC-DCPROXT6T-2-DN-400



DYNAMIC DARK

2 gr 1-MC-DCPROXT6T-2-DD-400




TOTAL DARK

2 gr 1-MC-DCPROXT6T-2-TD-400



DC SYSTEM



MULTIBOILER



COOL TOUCH
(OPTIONAL)



LEAD
FREE



ENERGY
SAVING




CUSTOM
COLOURS



CUSTOM
MATERIALS



58mm FILTER
(OPTIONAL)

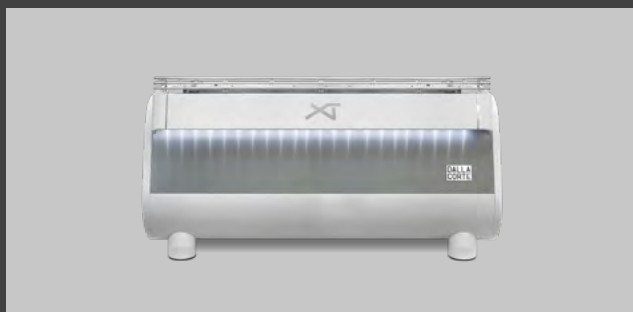

XT CLASSIC - 3 GROUPS

SIX PRE-SET PROFILES For each group you can set up to six different recipes and save them on the six programmable buttons. Get to know your customers and always be ready to make them their favourite coffee drink.

TEMPERATURE CONTROL The original patented multiboiler technology - only the best to extract your coffee at the perfect temperature, precise down to one decimal of a degree.

ERGONOMIC DC design in every detail to guarantee maximum comfort to the barista, 54mm portafilter and optional 58mm portafilter kit: you choose the best extraction.

dimensions (w x h x d)	940x525x510 mm
weight	88 kg
power consumption (24h-stand-by)	11,3 kW
max power	6,3 kW
connected load	230/240 V 1 Ph - 200/230 V 3, 400 V 3 N
boiler capacity	13 l
group head capacity	0,5 l
GCS Grinder Control System	optional
MCS Milk Control System	optional

Version 230 also available

XT CLASSIC - 3 GROUPS



DYNAMIC WHITE

2 gr 1-MC-DCPROXT6T-2-DW-400



TOTAL WHITE

2 gr 1-MC-DCPROXT6T-2-TW-400



WHITE OAK

2 gr 1-MC-DCPROXT6T-2-WO-400



DARK WALNUT

2 gr 1-MC-DCPROXT6T-2-DN-400



DYNAMIC DARK

2 gr 1-MC-DCPROXT6T-2-DD-400




TOTAL DARK

2 gr 1-MC-DCPROXT6T-2-TD-400



DC SYSTEM



MULTIBOILER



COOL TOUCH
(OPTIONAL)



LEAD
FREE



ENERGY
SAVING



CUSTOM
COLOURS



CUSTOM
MATERIALS



58mm FILTER
(OPTIONAL)